



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

Series 213, DN 10 ($\frac{3}{8}$ "

Ordering No. 21320-K.01-000.

Manually Actuated Venting Valve

Hand wheel

Advantages

- Simple opening and closing of the valve by loosening or tightening the screw cap



Ordering Information

Selection Data

Vacuum connection		DN 10 ISO-KF	DN 10 ISO-KF
Body	AISI / DIN	aluminum / 3.0615	stainless steel 303 / 1.4305
Plate	AISI / DIN	aluminum	stainless steel 304 / 1.4301
Screw cap	AISI / DIN	brass nickel-plated	brass nickel-plated

Manually Actuated Venting Valve

Type	21320-KA01-000.	21320-KE01-000.
------	-----------------	-----------------


Specifications

Leak rate	mbar l/s	1×10^{-9}	1×10^{-9}
Pressure range	mbar / bar min / max	1×10^{-8} / 1 (abs)	1×10^{-8} / 1 (abs)
Seal		FKM	FKM
Weight	kg	0.1	0.15

Spare Parts

O-ring	N-7100-206	N-7100-206
--------	------------	------------

Dimensions

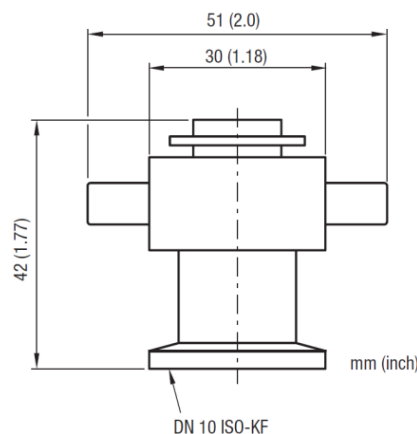

Created by: T. Eugster	Release date: 2013-08-09	1 of 1
Modified by:	Release date:	602416EA